



### HMI5100Bv2 | Standard HMI Series

## 10.1" Touchscreen HMI **(€**









Security, Datalogging

- Trends, Plots
- Pass through Mode
- Macros
- Serial & Ethernet




	CPU Memory (RAM)	Dual-Core RISC  128 MB	
System	Memory (Flash)	256 MB	
	RTC	Built-in	
	RIC	1 x DE9P COM1: RS-232, COM3: RS-232*	
	Serial	1 x DE9F COM1: No-232, COM3: N3-232 1 x DE9S COM2: RS-485 2 or 4 wire, COM3: RS-485 2 wires	
	LAN	1 x 10/100 Base-T RJ-45	
	CANbus	N/A	
ī	USB Host	1 x USB 2.0	
I/O Ports	USB Client	N/A	
	Audio	N/A	
	Video	N/A	
	Wi-Fi	N/A	
	HDMI®	N/A	
7		·	
	SD Card Slot	N/A	
	Display Type	10.1" TFT LCD	
	Size (W x H)	8.70 x 5.12 inches [221 x 130 mm]	
	Resolution (pixels)  Max. Colors	1024 x 600 16.7 M	
Display			
,	Luminance (cd/m²)	350	
	Viewing Angle (H°V°)	160/140	
	Contrast Ratio	500:1	
	Backlight Lifetime (hours)	50,000+	
Touch Screen	Type	4-wire resistive touch	
	Active Area Accuracy	Length (X) ±2%, width (Y) ±2%	
	Input Voltage	24 ± 20% VDC	
Electrical	Input Current	510 mA @ 24 VDC	
	Input Power	12.3 W	
_	Power Isolation	Built-in	
	Isolation Resistance	Exceed 50 MΩ at 500VDC	
	Enclosure	Plastic, charcoal grey	
Mechanical	PCB Coating	N/A	
Mechanical	Dimensions (W x H x D)	10.67 x 8.39 x 1.44 inches [271 x 213 x 36.5 mm]	
	Net Weight	Approx. 2.2 lbs. [1kg]	
	Mounting	Panel mounting	
	Operating Temperature	32° ~ 131°F (0° ~ 55°C)	
Fordersonatel	Storage Temperature	-4° ~ 140°F (-20° ~ 60°C)	
Environmental	Relative Humidity	10% ~ 90% (non-condensing)	
	Altitude (Air Pressure)	Below 3,000 meters (70.1 kPa)	
Ī	Vibration Endurance	10 to 25 Hz (X, Y, Z direction, 2G, 30 minutes)	
	Ratings	NEMA 4, IP65 compliant front panel	
	Certifications	CE, RoHS	
Software	EasyBuilder Pro (v6.08.01 or later)		
	*RTS/CTS cannot be used for COM1 RS-232 while COM3 RS-232 is in use.		
Notes	Specifications subject to change	ge without notice	







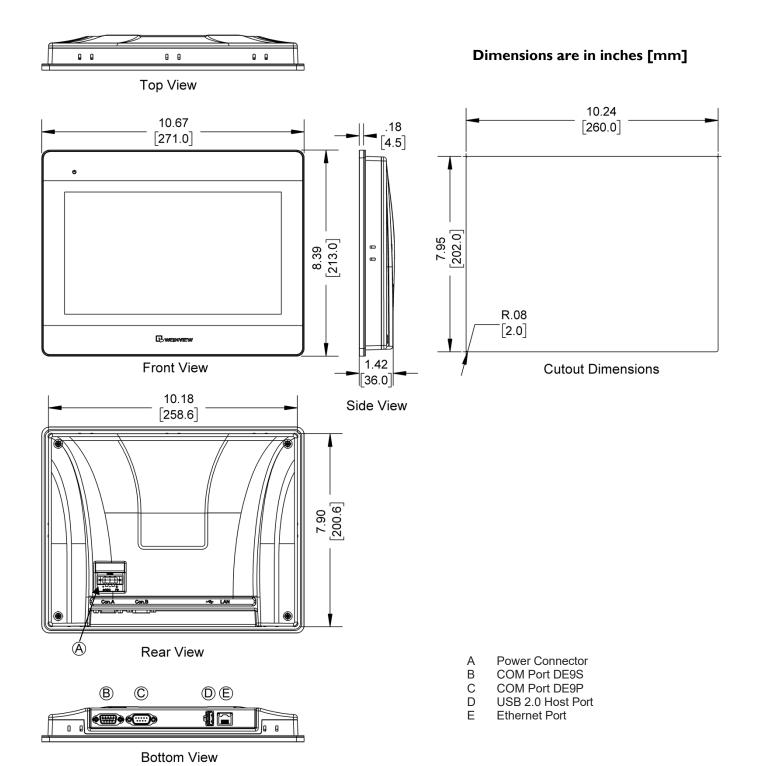



## Why Buy A Maple HMI

In addition to our powerful and affordable hardware, we'll also continue to support your company long after a sale. Wide product selection, large in-stock inventory, outstanding product warranty, free technical support and software, and in-house repairs with quick turnaround times, Maple Systems has your business covered.



#### Class I, Division 2 HMIs

We offer CID2 certified HMIs designed to keep operators and their environment safe. These HMIs are being used in a potentially dangerous environment or around flammable hazards every day, and are designed to prevent dangerous explosions and ensure worker safety.

Our CID2 HMIs (HMI5070L and HMI5070LB) are used in industries including oil and gas, mining, painting, chemical processing, pharmaceutical, food processing, and more.

We also have CID2/Atex certified Industrial Panel PCs and Industrial Monitors. And for those looking for PLC functionality, we offer a Class I, Div 2 HMI+PLC combo series.

#### **Remote Access**

Remote access is the ability to access a HMI or connected device, from another device, at any time, and from anywhere. With our free HMI configuration software and supported hardware solutions, you have the freedom to access the HMI, and all its data and applications, from another device (ex. tablet, smart phone, PC) and control it as if you were standing in front of it.

Need more? Access the Industrial Internet of Things (IIoT) with our Advanced HMIs. Take data from your factory floor and share it with a server (local or a cloud service), offering greater efficiency for network use and enabling better access to and better sharing data for your entire organization.

#### **Build your SCADA**

We offer all the components you need to create your own unique level of supervisory data acquisition and control, from the simplest stand-alone machine to sophisticated multi-device networked production line(s), all the way to enterprise-level operations and IIoT functionalities leveraging cloud connectivity.

Our products can help you standardize communications between devices, gluing different systems together for one source to your SCADA. No need to redesign your entire application. Keep the components that are already working for you, just add Maple Systems components to grow your abilities to supervise, control, and acquire data.

## Power and Flexibility

# **Incredible Functionality Out of the Box**

- Easily and quickly create the project with functional objects including numeric object, lamp object, combobutton, alarms, and recipes
- · Pick and place objects, pictures, and shapes
- Import/export recipes
- · Create trend display, graphs, XY plots, and pie charts
- · Add passwords and security levels
- Assign communication (PLC) drivers easily and more with our Free HMI software

Additionally our HMIs support remote access solutions with VNC, MQTT, and OPC UA. For additional features see our Advanced HMI series.



# **User Friendly HMI Configuration Software**

Because designing the layout of screens and user-interface (UI) of the HMI is typically where most of the development time is spent, we've made our Free HMI configuration software easy to use.

- Import tags feature
- Tools to diagnose and monitor PLC to HMI connection
- Debugging tools
- Pre-built libraries
- Off-line and on-line simulation

These are just a few of the ways our software makes creating your project easier. We also have controller information sheets, cable drawings, sample projects, Getting Started Guides, and videos/tutorials available in our support center 24/7.





Matsushita

## Programmable Logic Controller (PLC) Connectivity

With over 300 PLC & Controller communication protocols, these HMIs will easily integrate with your preferred PLC brands, including:

Allen-Bradley
Siemens
Omron
Emerson
GE
Panasonic
Mitsubishi
...and many more

Panel Mount HMI Feature Overview				
With few exceptions, all our Standard HMIs support (this covers all the HMI prefix models, ex: HMI5043L/LB, HMI5070L/LB):	With few exceptions, all our Advanced HMIs support (this covers all the cMT2xxx series):	With few exceptions, all our High Performance HMIs support (this covers all the cMT3xxx series HMIs):		
Alarm & Event Messages	Alarm & Event Messages	Alarm & Event Messages		
Animation - Flow Block	Animation - Flow Block	Animation - Flow Block		
ASCII Characters	ASCII Characters	ASCII Characters		
Bar Graphs	Bar Graphs	Bar Graphs Combo Button		
Combo Button	Combo Button			
Data Logging and Sampling  Date / Time	Data Logging and Sampling  Date / Time	Data Logging and Sampling  Date / Time		
Dynamic Drawing	Dynamic Drawing	Dynamic Drawing		
Dynamic Scale	Dynamic Scale	Dynamic Scale		
EasyAccess 2.0	EasyAccess 2.1	EasyAccess 2.0		
EasyWatch	EasyWatch	EasyWatch		
Enhanced Security Mode	Enhanced Security Mode	Enhanced Security Mode		
Event Alarm Log	Event Alarm Log	Event Alarm Log		
File Browser	File Browser	File Browser		
Grid Display	Grid Display	Grid Display		
Languages (Up to 24)	Languages (Up to 24)	Languages (Up to 24)		
Libraries	Libraries	Libraries		
Macros	Macros	Macros		
Meters & Gauges	Meters & Gauges	Meters & Gauges		
Modbus	Modbus	Modbus		
Objects (Grouping, Layering, Aligning, Flip)	Objects (Grouping, Layering, Aligning, Flip)	Objects (Grouping, Layering, Aligning, Flip)		
Off-line / On-line Simulation	Off-line / On-line Simulation	Off-line / On-line Simulation		
OPC UA Client	OPC UA Client	OPC UA Client		
Operation Log	Operation Log	Operation Log		
Pass-Through Mode	Pass-Through Mode	Pass-Through Mode		
Picture Object	Picture Object	Picture Object		
Picture Viewer	Picture Viewer	Picture Viewer		
Pie Chart	Pie Chart	Pie Chart		
PLC Tag Embedded in Project	PLC Tag Embedded in Project	PLC Tag Embedded in Project		
Project Password	Project Password	Project Password		
Recipes	Recipes	Recipes		
Remote Access	Remote Access	Remote Access		
Scheduler	Scheduler	Scheduler		
Security Levels (Enhanced) System Setting Editor	Security Levels (Enhanced) System Setting Editor	Security Levels (Enhanced) System Setting Editor		
Table	Table	Table		
		Text Object		
Text Object Timer Object	Text Object Timer Object	Timer Object		
·	·	·		
Trend Display (Graphs)  User-Defined Start-Up Screen	Trend Display (Graphs) User-Defined Start-Up Screen	Trend Display (Graphs) User-Defined Start-Up Screen		
Utility Manager	Utility Manager	Utility Manager		
VNC Server	VNC Server	VNC Server		
XY Plot	XY Plot	XY Plot		
Email (I)	Email	Email		
Macro Windows Open / Cycle / Close (I)	Macro Windows Open / Cycle / Close	Macro Windows Open / Cycle / Close		
MQTT (I)	MQTT	MQTT		
	-	1		
String Table (1) Time Synchronization (1)	String Table Time Synchronization	String Table Time Synchronization		
USB Tethering (I)	USB Tethering	USB Tethering		
VNC Viewer (I)	VNC Viewer	VNC Viewer		
The field (1)	IP Camera	IP Camera		
	USB Camera	USB Camera		
	Animation (Objects, Word Lamp, GIFs, Moving Shape)	Animation (Objects, Word Lamp, GIFs, Moving Shape)		
	BACnet	BACnet		
	CANbus	CANbus		
	cMT Diagnoser	cMT Diagnoser		
	cMT Viewer Support	cMT Viewer Support		
	CODESYS (2)	CODESYS (2)		
	Media Player	Media Player		
	MQTT - Advanced JSON	MQTT - Advanced JSON		
	MQTT - AWS IoT, Sparkplug B, Azure IoT Hub, Google	MQTT - Advanced JSON  MQTT - AWS IoT, Sparkplug B, Azure IoT Hub, Google		
	Cloud IoT Core PDF Reader	Cloud IoT Core  PDF Reader		
	Web Streaming	Web Streaming		
	WebView	WebView		
	TOUTIEN	Barcode Scanner (Android Camera)		
		Database Server		
		File Transfer Protocol (FTP)		
		OPC UA Server		
		PLC Web Browser		
		SQL Database Server Integration		
	Always check the software to see if a feature is support			

This table is for illustration only and subject to change. Always check the software to see if a feature is supported in your specific hardware.

<sup>(</sup>I) Not supported in the B Series

<sup>(2)</sup> Not supported on the cMT2166X