


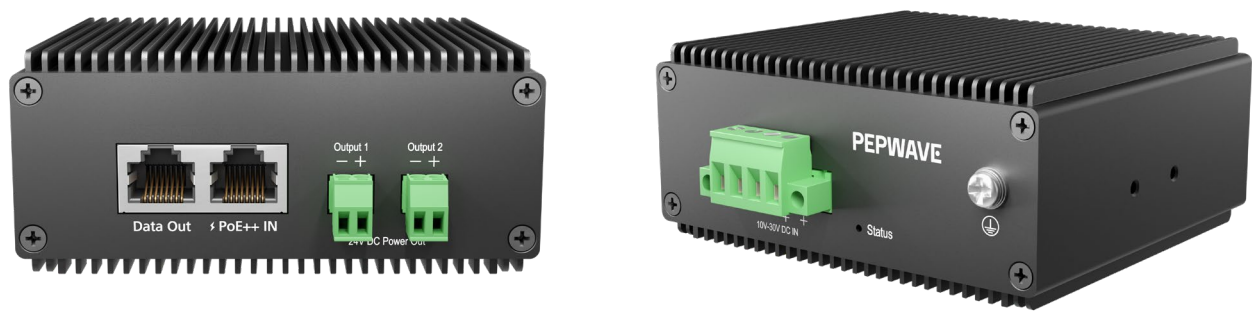

Specification

PoE Input	802.3bt (802.3af/at compatible) or DC Input (10-30V)	Product Dimensions	101 x 90 x 43.5 mm
DC Output	24V	Enclosure Material	Rugged Anodized Aluminum
MAX Output Power	80W	Operating Temperature	-40°C to +70°C -104°F to +158°F
Efficiency	88-91%	Certification	FCC/IC/CE/ROHS/REACH
Ethernet Interface	2 x 10/100/1000/2500M	Input and Output Galvanic Isolation	Power and Ethernet
Weight	630g	Package Contents	Splitter MAX S M4 x 27mm Brass Hexagonal Standoff, Male-Female (Pack of 4)

Immunity & Transient Protection

Protection Type	Standard	Level	Details
ESD	IEC 61000-4-2	Level 4	±8 kV contact, ±15 kV air
EFT	IEC 61000-4-4	Level 4	±2 kV for PoE IN port
Surge	IEC 61000-4-4	Level 4	±4 kV, 1.2/50µs, Line-to-Ground for PoE IN port

Ordering Information

Product Code	Description
ACW-SPLT-MAX-S ACW-724	Splitter MAX S Ear Mount Kit