

A refinement in outdoor interconnectivity

The HD1 Dome Pro adapts to the flexible nature of outdoor deployments, offering powerful speeds, with refined Wi-Fi options. The **5G modem**, with its **embedded cellular antennas**, ensures minimal cable loss and offers the finest signal quality.



Wi-Fi as **WAN**

Wi-Fi 6

The Wi-Fi 6 and Wi-Fi as WAN support can optimize your network and provide versatility as and when required. Leverage bandwidth costs and easily expand your network. Experience no more interruptions with SpeedFusion's hot failover options.





Instant flexibility with the SIM injector.

Simply connect an Ethernet cable between the SIM injector^ and the HD1 Dome Pro to manage up to **10 physical SIMs**.

With remote network management available via Peplink's cloud-based management system, InControl2, accessibility worries are a thing of the past.

SIM Injector Specifications

SIM Slots 8x Active SIM Slots, Standard Size

4x GE, PoE 802.3at Support

Power Input DC Jack / Terminal Block: 12-56V

Dimensions 1.6 x 5.8 x 5 inches / 40 x 147 x 128 mm

Weight

430 grams / 0.94 pounds

Operating Temperature

Humidity

-40 - 149 °F / -40 - 65 °C

15% - 95% (non-condensing)



^We are now offering bundle value when purchased together. Contact your point of sales for more information.

LAN Interface



Together it works

The HD1 Dome Pro can **optimize network performance** with its PoE functionality. Leverage the power of SpeedFusion by simply connecting Peplink PoE routers, for a mega-bandwidth channel, with the simplest failover option. Or alternatively, extend the Wi-Fi range by connecting an external access point.



A design that's made to meet your needs










t Ethernet Splitter

Mounting Bracket

It's simple design offers a multitude of installation options. The HD1 Dome Pro includes an M35 screw mount and Ethernet splitter, making it easy for wall or pole mount. If mounting is not needed, simply connect an Ethernet cable and it's good to go.



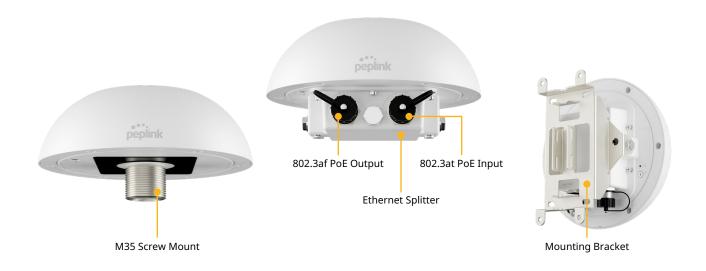

Specifications

WAN Interface	1x 5G/LTE Modem with Redundant SIM Slots ¹	Power Consumption	20 W (max., without PoE output)
LAN Interface	1x 10/100/1000M Ethernet ^{2 3}	Dimension	4.33 inches (radius) x 4.53 inches (height) 110 mm (radius) x 115 mm (height)
Wi-Fi Interface	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MIMO Wi-Fi WAN and/or AP	Weight	With Ethernet Splitter: 3.75 pounds / 1.7 kg Without Ethernet Splitter: 2.65 pounds / 1.2 kg
Number of SpeedFusion VPN Peers	2	Operating Temperature	-40°- 149°F / -40°- 65°C
		Humidity	15% – 95% (non-condensing)
Enclosure	Rugged outdoor IP67 (with Ethernet Splitter)	Certifications	FCC, CE, RoHS, EN 50124-1 Railway Application - Insulation
Recommended Users	150		Coordination
Cellular Data Rate (Downlink / Uplink)	5G: 3.4 Gbps / 900 Mbps		EN 50155 Railway Application - Rolling Stock - Electronic Equipment EN 61000 Electromagnetic Compatibility
Antenna	4X4 Internal MIMO Cellular Antennas 2X2 Internal MIMO Wi-Fi Antennas 1x Internal GPS Antenna	Package Content	MAX HD1 Dome Pro, Ethernet Splitter, 2x Waterproof Ethernet Connector (ACW-112), Mounting Kit Set
Power Input	1x 802.3at PoE+		3
Power Output	1x 802.3af PoE (with Ethernet Splitter)	SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles) ⁵ RemoteSIM from SIM Injector FusionSIM
		Warranty	1-Year Limited Warranty

¹ SIM Injector is available separately. ² Ethernet LAN port can be split into two LAN ports using the included splitter (1x LAN 802.3af PoE out, 1x LAN 802.3at PoE+ in). ³ Ethernet port includes surge and ESD protection circuits to protect against over-voltage transients.

⁴ Certification Pending. ⁵ Available with Firmware 8.4.0 or above.



Ordering Information

Product Code

MAX-HD1-DOM-PRO-5GN Embedded Modem(s): 1x 5G

Regions

Global*

*US Carrier Certifications: AT&T, T-Mobile, Verizon, FirstNet

5G Bands

5G (SA & NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79

LTE Bands

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

Featured Add-on

Product Code


Description

SIM-BK8-4E-56V-DOM


MAX HD1 Dome Pro Bundle Offer - SIM Injector , 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC




Cellular Antenna VSWR

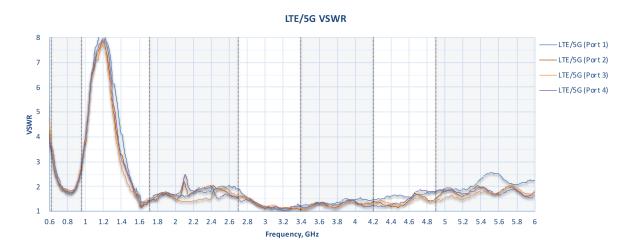

Cellular Antenna Gain

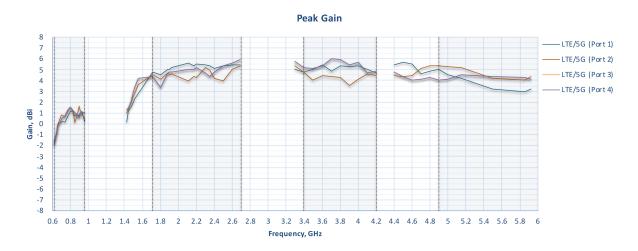


Cellular Antenna Efficiency

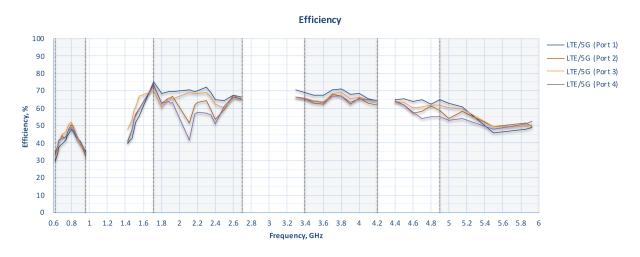




Wi-Fi Antenna VSWR

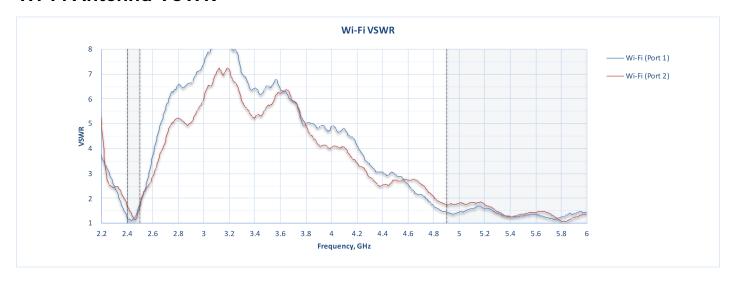

Wi-Fi Antenna Gain

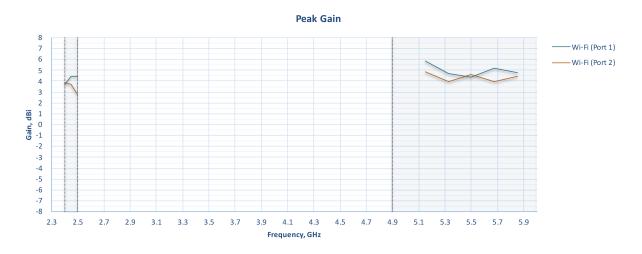



Wi-Fi Antenna Efficiency








LTE Radiation Patterns (Azimuth)





















LTE Radiation Patterns (Elevation 1)





















LTE Radiation Patterns (Elevation 2)



















Wi-Fi Radiation Patterns (Azimuth)

2400-2500 MHz



Wi-Fi Radiation Patterns (Elevation 1)





Wi-Fi Radiation Patterns (Elevation 2)

