Switch Series

Flexible managed PoE switches in the Peplink ecosystem

8 PoE 10G Switch



48 PoE 2.5G Switch



24 PoE 2.5G Switch

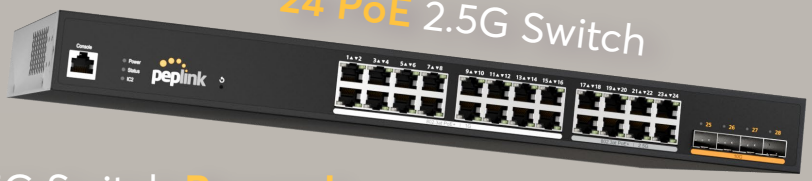

24 PoE 2.5G Switch Rugged



TAA COMPLIANT

"Single Pane of Glass"

InControl² | InTouch

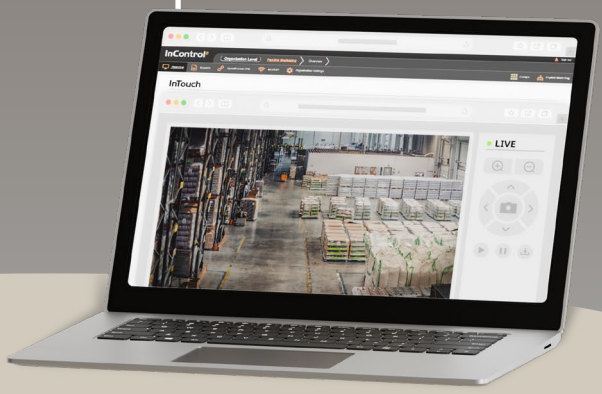

Manage any switch-connected end-point device remotely via **InTouch**



Manage your entire network with our **InControl²** management platform

Note: Currently, these Switches can only be configured through InControl. However, a new feature for our Peplink routers, the Switch Controller, will be available soon, enabling offline local management of multiple Switches without the need for InControl.

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.

Available from DCI Technologies Inc. www.dcitech.com ref: 2507 - v04

peplink

Simplify Networks

Centralized power up to **740w**. **Gigabit**, **Multi-gigabit** and **SFP+ connections**.

740w



Total Network Control

- Port Control
- VLAN
- Traffic Monitoring
- Individual Port Power

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.
Available from DCI Technologies Inc. www.dcitech.com ref: 2507 - v04

Switch Series

8 PoE 10G Switch

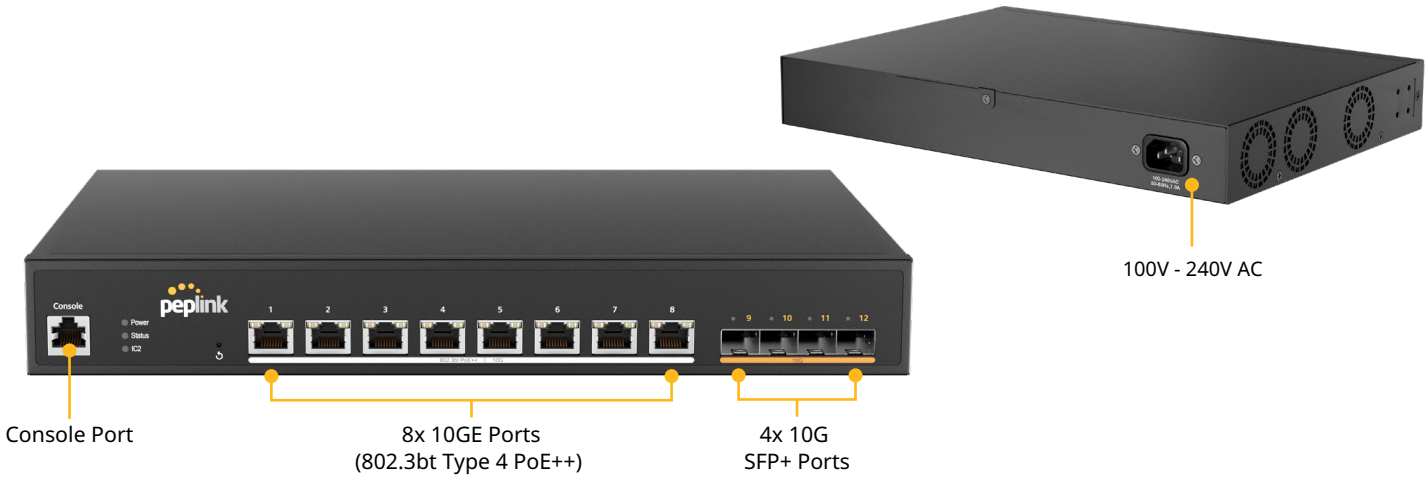

24 PoE 2.5G Switch Rugged

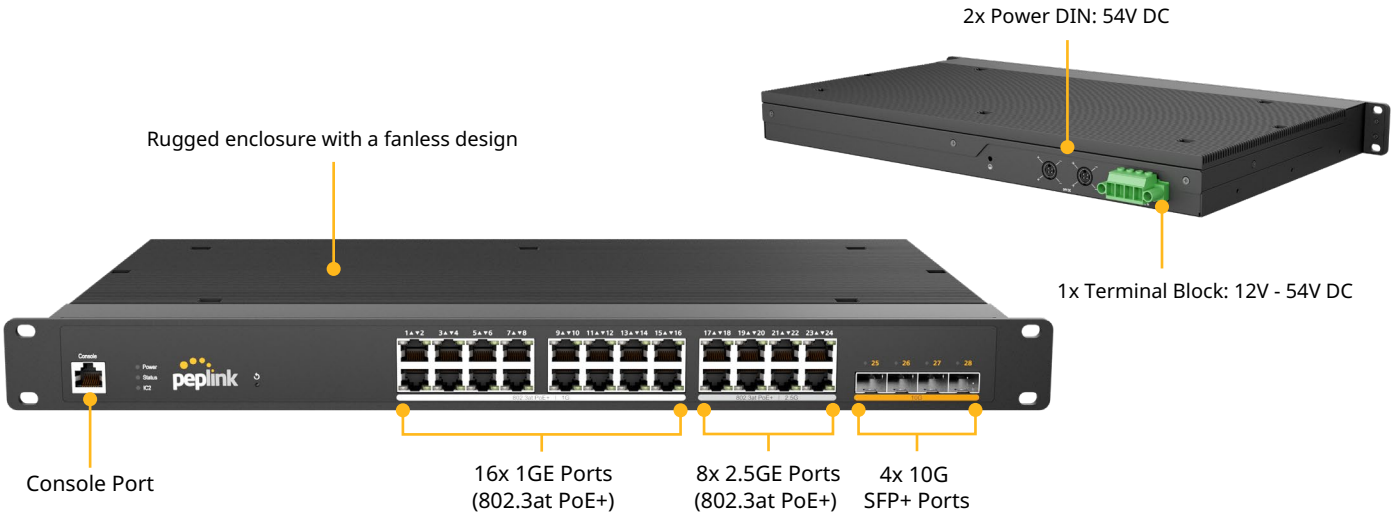

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.

Switch Series

24 PoE 2.5G Switch

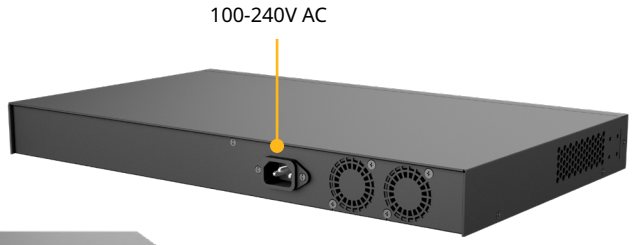

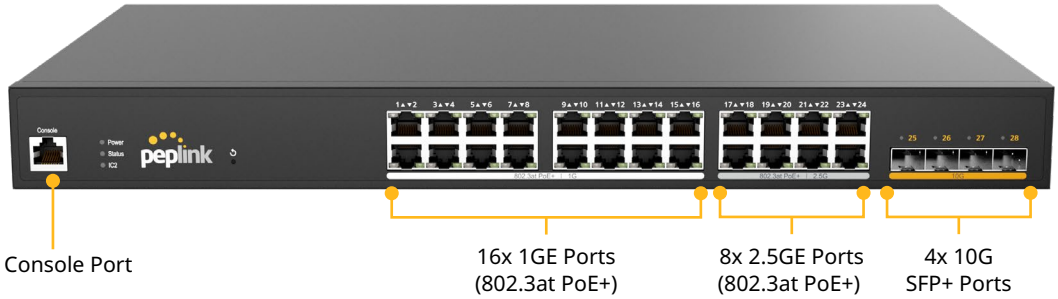

48 PoE 2.5G Switch



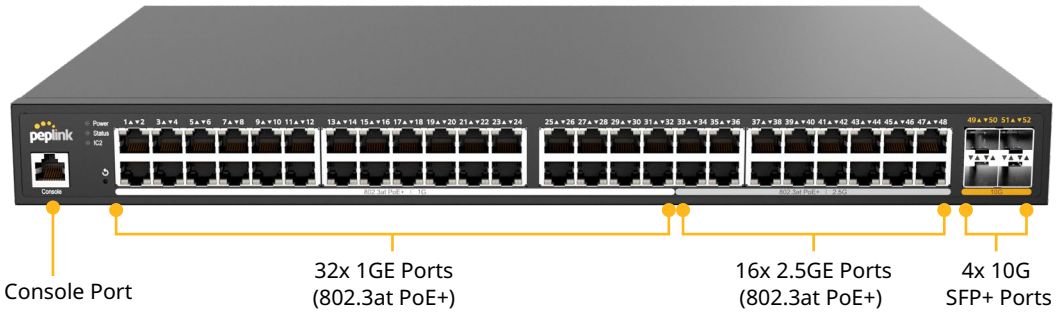

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved. Available from DCI Technologies Inc. www.dcitech.com ref: 2507 - v04

Switch Series

	8 PoE 10G Switch	24 PoE 2.5G Switch Rugged
		

Specifications

Interface		
• **RJ45**	8x 10GE l 802.3bt Type 4 PoE++	16x 1GE l 802.3at PoE+ 8x 2.5GE l 802.3at PoE+
• **SFP+**	4x 10G	4x 10G
Switch Capacity	240 Gbps	152 Gbps
Max. Packet Forwarding Rate	179 Mpps	216 Mpps
MAC Address Table	32,000	16,000
Power Supply	1x Internal PSU (900W)	1x External PSU (300W) • AC Input: 100-240V, 4A • DC Output: 54V, 5.56A
Power Input	1x 100V – 240V AC	2x Power DIN: 54V DC 1x Terminal Block: 12V - 54V DC
Power Consumption	53W (System)	38W (System)
Total PoE Power Budget	720W	250W
Dimensions (D x W x H)	9.1 x 13.0 x 1.8 inches 230 x 330 x 44 mm	10.5 x 19.1 x 1.8 inches 265 x 485 x 45mm
Weight	6.4 pounds / 2.9 kg	11.3 pounds / 5.1 kg
Operating Temperature	32° – 122°F / 0° – 50°C	-40° – 149°F / -40° – 65°C
Humidity	15% – 95% (non-condensing)	15% - 95% (non-condensing)
Certification	FCC, CE, RoHS	FCC, CE, RoHS
Warranty	1-Year Limited Warranty	1-Year Limited Warranty
Package Content	1x 8 PoE 10G Switch 1x Power Cord 1x Screw Set 1x Rubber Foot Pad Set 1 Pair of Mounting Brackets	1x 24 PoE 2.5G Switch Rugged 1x Power Cord 1x 300W PSU 1x Screw Set 1x Rubber Foot Pad Set
Management/ Configuration*	InControl	InControl

*Note: Currently, these Switches can only be configured through InControl. However, a new feature for our Peplink routers, the Switch Controller, will be available soon, enabling offline local management of multiple Switches without the need for InControl.

Specifications are subject to change without notice.

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.

Switch Series

	24 PoE 2.5G Switch	48 PoE 2.5G Switch
		

Specifications

Interface		
• **RJ45**	16x 1GE l 802.3at PoE+ 8x 2.5GE l 802.3at PoE+	32x 1GE l 802.3at PoE+ 16x 2.5GE l 802.3at PoE+
• **SFP+**	4x 10G	4x 10G
Switch Capacity	152 Gbps	224 Gbps
Max. Packet Forwarding Rate	216 Mpps	318 Mpps
MAC Address Table	16,000	32,000
Power Supply	1x Internal PSU (480W)	1x Internal PSU (900W)
Power Input	1x 100V – 240V AC	1x 100V – 240V AC
Power Consumption	38W (System)	64W (System)
Total PoE Power Budget	410W	740W
Dimensions (D x W x H)	10.3 x 17.3 x 1.8 inches 260 x 440 x 45 mm	12.2 x 17.3 x 1.8 inches 310 x 440 x 45 mm
Weight	9.0 pounds / 4.1 kg	10.8 pounds / 4.9 kg
Operating Temperature	32° – 122°F / 0° – 50°C	32° – 122°F / 0° – 50°C
Humidity	15% – 95% (non-condensing)	15% – 95% (non-condensing)
Certification	FCC, CE, RoHS	FCC, CE, RoHS
Warranty	1-Year Limited Warranty	1-Year Limited Warranty
Package Content	1x 24 PoE 2.5G Switch 1x Power Cord 1x Screw Set 1x Rubber Foot Pad Set 1 Pair of Mounting Brackets	1x 48 PoE 2.5G Switch 1x Power Cord 1x Screw Set 1x Rubber Foot Pad Set 1 Pair of Mounting Brackets
Management/ Configuration*	InControl	InControl

*Note: Currently, these Switches can only be configured through InControl. However, a new feature for our Peplink routers, the Switch Controller, will be available soon, enabling offline local management of multiple Switches without the need for InControl.

Specifications are subject to change without notice.

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.

Switch Series

Ordering Information

Product Code	Description
PLS-8-10G-720W	**8 PoE 10G Switch** • 8x 10GE (802.3bt Type 4 PoE++) RJ45 ports • 4x 10G SFP+ ports • 720W PoE power budget
PLS-R-24-H2G-250W	**24 PoE 2.5G Switch Rugged** • Rugged Enclosure with with a fanless design for industrial environments • 16x 1GE (802.3at PoE+) RJ45 ports • 8x 2.5GE (802.3at PoE+) RJ45 ports • 4x 10G SFP+ ports • 250W PoE power budget
PLS-24-H2G-410W	**24 PoE 2.5G Switch** • 16x 1GE (802.3at PoE+) RJ45 ports • 8x 2.5GE (802.3at PoE+) RJ45 ports • 4x 10G SFP+ ports • 410W PoE power budget
PLS-48-H2G-740W	**48 PoE 2.5G Switch** • 32x 1GE (802.3at PoE+) RJ45 ports • 16x 2.5GE (802.3at PoE+) RJ45 ports • 4x 10G SFP+ ports • 740W PoE power budget

Featured Add-on

Product Code	Description
PRM-A-1Y / PCP-A-1Y PRM-A-2Y / PCP-A-2Y PRM-A-4Y / PCP-A-4Y	PrimeCare A / PrimeCare+ A (1-Year) PrimeCare A / PrimeCare+ A (2-Year) PrimeCare A / PrimeCare+ A (4-Year) • Available for 8 PoE 10G Switch & 24 PoE 2.5G Switch
PRM-B-1Y / PCP-B-1Y PRM-B-2Y / PCP-B-2Y PRM-B-4Y / PCP-B-4Y	PrimeCare B / PrimeCare+ B (1-Year) PrimeCare B / PrimeCare+ B (2-Year) PrimeCare B / PrimeCare+ B (4-Year) • Available for 48 PoE 2.5G Switch & 24 PoE 2.5G Switch Rugged

Copyright © 2025 Peplink Pte. Limited. All Rights Reserved.